

GD

系列 Series

特点 Features


- 100KHZ 低阻抗, 105°C 2000~4000小时。
Low impedance at 100KHZ, Load life: 105°C 2000~4000 hours.
- 高频率低ESR、承受高纹波电流。
Enabled high ripple current by a reduction of ESR at high frequency range.
- RoHS指令已对应完毕。Adapted to the RoHS directive.



主要技术性能 Specifications

| 项目 Items | 特性 Performance Characteristics | | | | |
|---|--|-------|-------|-------|------|
| 使用温度范围 Operating Temperature Range | -40~+105°C | | | | |
| 额定电压范围 Rated Voltage Range | 6.3~25V | | | | |
| 标称电容量范围 Nominal Capacitance Range | 100~3300μF | | | | |
| 标称电容量允许偏差 Capacitance Tolerance | ±20% (120Hz, +20°C) | | | | |
| 漏电流 Leakage Current | I≤0.01CV (μA) 2分钟(at 20°C, after 2 minutes) | | | | |
| 损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz) | U _R (V) | 6.3 | 10 | 16 | 25 |
| | tgδ | 0.18 | 0.14 | 0.12 | 0.10 |
| | 容量大于1000μF者, 每增加1000μF, 其损耗角正切值增加0.02 When nominal capacitance exceeds 1000μF, add 0.02 to the value above for each 1000μF increase. | | | | |
| 温度特性Temperature Characteristics (Impedance ratio at 120Hz) | U _R (V) | 6.3 | 10 | 16 | 25 |
| | Z-40°C / Z+20°C | 8 | 6 | 6 | 6 |
| | ΦD | 5 | 6.3 | 8 | ≥10 |
| | Load life | 2000h | 3000h | 4000h | |
| 耐久性 Load Life | 105°C, 按上表时间加额定电压, 恢复16小时后: At 105°C, for the time above, After applying rated voltage and then resumed for 16 hours: 电容量变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏 电 流 Leakage current : ≤初始规定值 ≤The initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value | | | | |
| 高温贮存 Shelf Life | +105°C, 1000小时贮存后, 恢复16小时后: After storage for 1000 hours at +105°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏 电 流 Leakage current : ≤2倍初始规定值 ≤2times of the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value | | | | |

外形图及尺寸表 Case Size Table

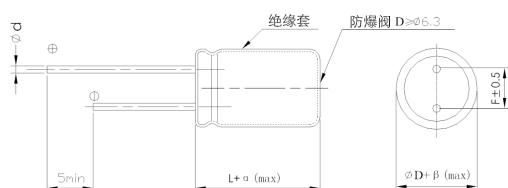

| 单位 Unit: mm | | | | | | |
|-------------|-----|---------|-----|-----|------|-----|
| D | 5 | 6.3 | 8 | 10 | 12.5 | |
| F | 2.0 | 2.5 | 3.5 | 5.0 | 5.0 | 7.5 |
| d | 0.5 | 0.5、0.6 | 0.6 | 0.8 | | |

| αMAX | | βMAX | |
|----------|-----------|----------|----------|
| c L < 20 | c L > 1.5 | c D < 20 | c D ≥ 20 |
| 0.5 | 2.0 | 0.5 | 1.0 |
| 1.5 | 2.0 | 0.5 | 1.0 |

频率修正系数 Frequency Coefficient

| Freq.(Hz) CAP(μF) | 120 | 1K | 10K | 100K |
|----------------------|------|------|------|------|
| 100~3300 | 0.50 | 0.80 | 0.90 | 1.00 |

尺寸 Dimensions

| CAP(μF) | WV | 6.3V(0J) | | | 10V(1A) | | | 16V(1C) | | | 25V(1E) | | |
|---------|-----|----------|-------|--------|---------|-------|--------|---------|-------|--------|---------|-------|--------|
| | | Size | ESR | Ripple | Size | ESR | Ripple | Size | ESR | Ripple | Size | ESR | Ripple |
| 100 | 101 | 5×11 | 0.245 | 240 | 5×11 | 0.300 | 250 | | | | 6.3×11 | 0.085 | 600 |
| 220 | 221 | | | | 6.3×11 | 0.065 | 410 | 6.3×11 | 0.055 | 420 | 8×11.5 | 0.052 | 820 |
| 330 | 331 | | | | 8×11.5 | 0.038 | 950 | 8×11.5 | 0.036 | 1140 | 8×11.5 | 0.034 | 1050 |
| 470 | 471 | | | | | | | | | | 8×20 | 0.026 | 1450 |
| 560 | 561 | 8×11.5 | 0.038 | 1080 | 8×11.5 | 0.038 | 960 | | | | | | 1650 |
| 680 | 681 | 8×11.5 | 0.038 | 1100 | 8×11.5 | 0.036 | 1080 | 8×16 | 0.028 | 1490 | 8×20 | 0.023 | 1700 |
| 820 | 821 | 8×11.5 | 0.036 | 1140 | 8×16 | 0.029 | 1450 | | | | 10×20 | 0.020 | 1800 |
| 1000 | 102 | 8×16 | 0.036 | 1200 | 8×16 | 0.028 | 1490 | 8×20 | 0.022 | 1870 | 10×20 | 0.018 | 2180 |
| | | 10×12.5 | 0.027 | 1500 | 10×12.5 | 0.026 | 1540 | 10×16 | 0.020 | 1910 | | | |
| 1200 | 122 | 8×16 | 0.028 | 1490 | 8×20 | 0.023 | 1850 | 10×20 | 0.017 | 2540 | | | |
| | | 10×12.5 | 0.027 | 1520 | | | | | | | | | |
| 1500 | 152 | 8×20 | 0.020 | 1870 | 8×20 | 0.023 | 1900 | 10×20 | 0.018 | 2650 | 12.5×20 | 0.016 | 2480 |
| | | 10×12.5 | 0.022 | 1540 | 10×16 | 0.022 | 2000 | | | | | | |
| 1800 | 182 | 10×16 | 0.019 | 1850 | 10×20 | 0.020 | 2450 | 10×25 | 0.015 | 2800 | | | |
| 2200 | 222 | 8×20 | 0.018 | 1870 | 10×20 | 0.018 | 2500 | | | | | | |
| | | 10×16 | 0.018 | 1910 | 10×25 | 0.016 | 2650 | | | | | | |
| 2700 | 272 | | | | | | | 12.5×30 | 0.014 | 3000 | 16×30 | 0.015 | 2555 |
| 3300 | 332 | 10×25 | 0.015 | 2800 | | | | | | | | | |

Size $\phi D \times L$ (mm)
Maximum Allowable Ripple Current (mA rms) at 105°C 100KHz
Maximum ESR (Ω) at 20°C 100KHz

目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承兑书，并以此为基准使用。
The contents recorded in the catalogue might be changed without any reminder. Please ask for providing the datasheet and take it as standard when purchasing.

ALUMINUM ELECTROLYTIC CAPACITORS SMD MINIATURE STANDARD LOW-ESR SWITCH-POWER LIGHTING SNAP-IN SCREW